

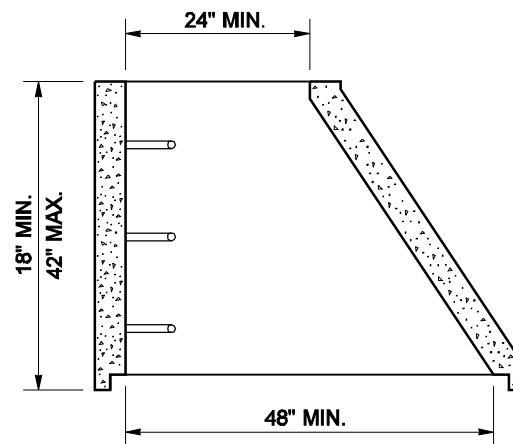
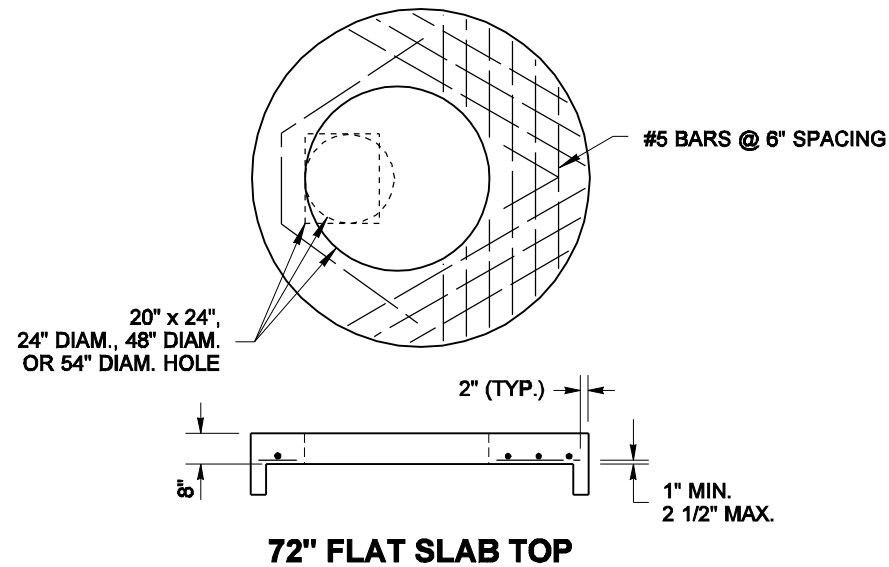



**TYPICAL ORIENTATION
FOR ACCESS AND STEPS**

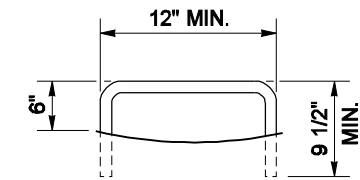

ECCENTRIC CONE SECTION

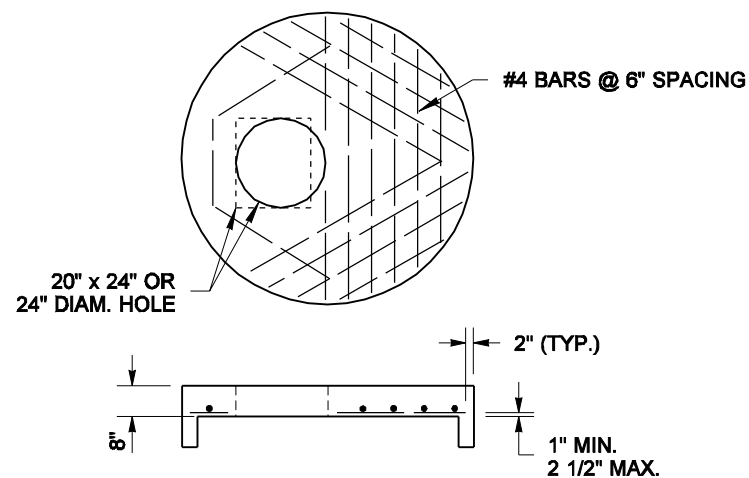


STEP

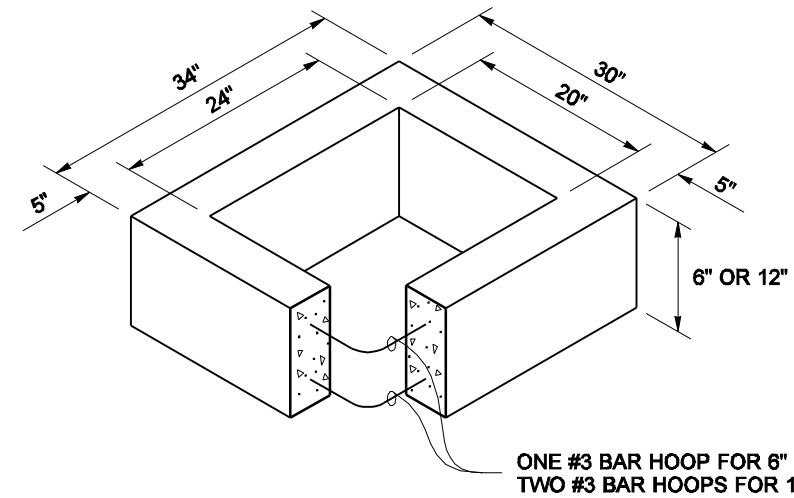


RECTANGULAR ADJUSTMENT SECTION

1 As an acceptable alternative to rebar, wire mesh having a minimum area of 0.12 square inches per foot may be used for adjustment sections.

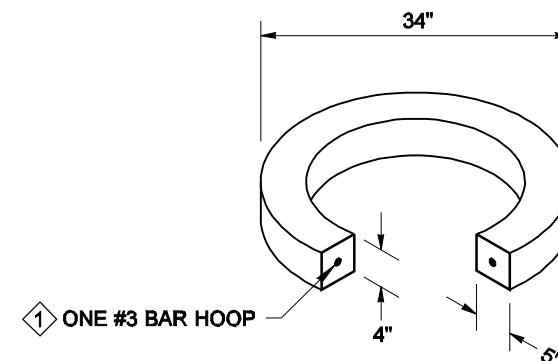

CIRCULAR ADJUSTMENT SECTION

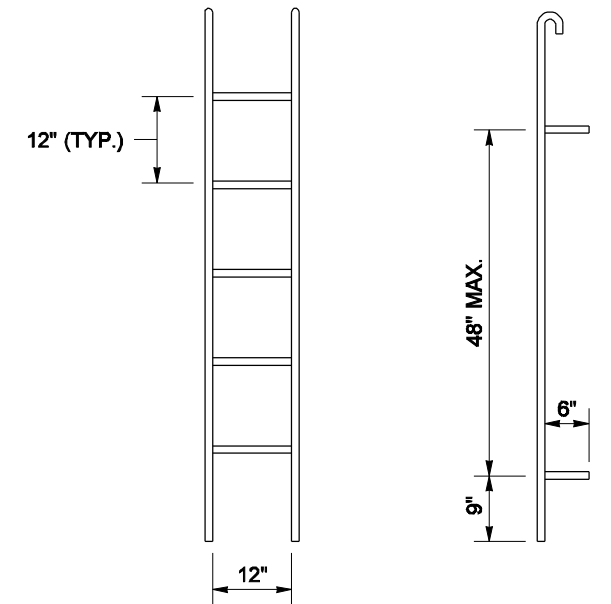

PREFABRICATED LADDER



EXPIRES JULY 1, 2007

**MISCELLANEOUS DETAILS
FOR
DRAINAGE STRUCTURES
STANDARD PLAN B-30.90-00**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Harold J. Peterfeso **06-08-06**

STATE DESIGN ENGINEER

DATE



Washington State Department of Transportation

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT
ELECTRONICALLY TRANSMITTED OR PRINTED FROM A DIGITAL
FILE. THE ENGINEER'S ORIGINAL SIGNATURE IS REQUIRED FOR
THE ENGINEER'S APPROVAL OF THE DESIGN. THE ORIGINAL
FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION.
A COPY MAY BE OBTAINED UPON REQUEST.